




Keurig K10 MINI PLUS Handle Replacement

This guide we will create a guide to replace the handle of the Keurig K10 Mini Plus series

Written By: Roberto Maldonado

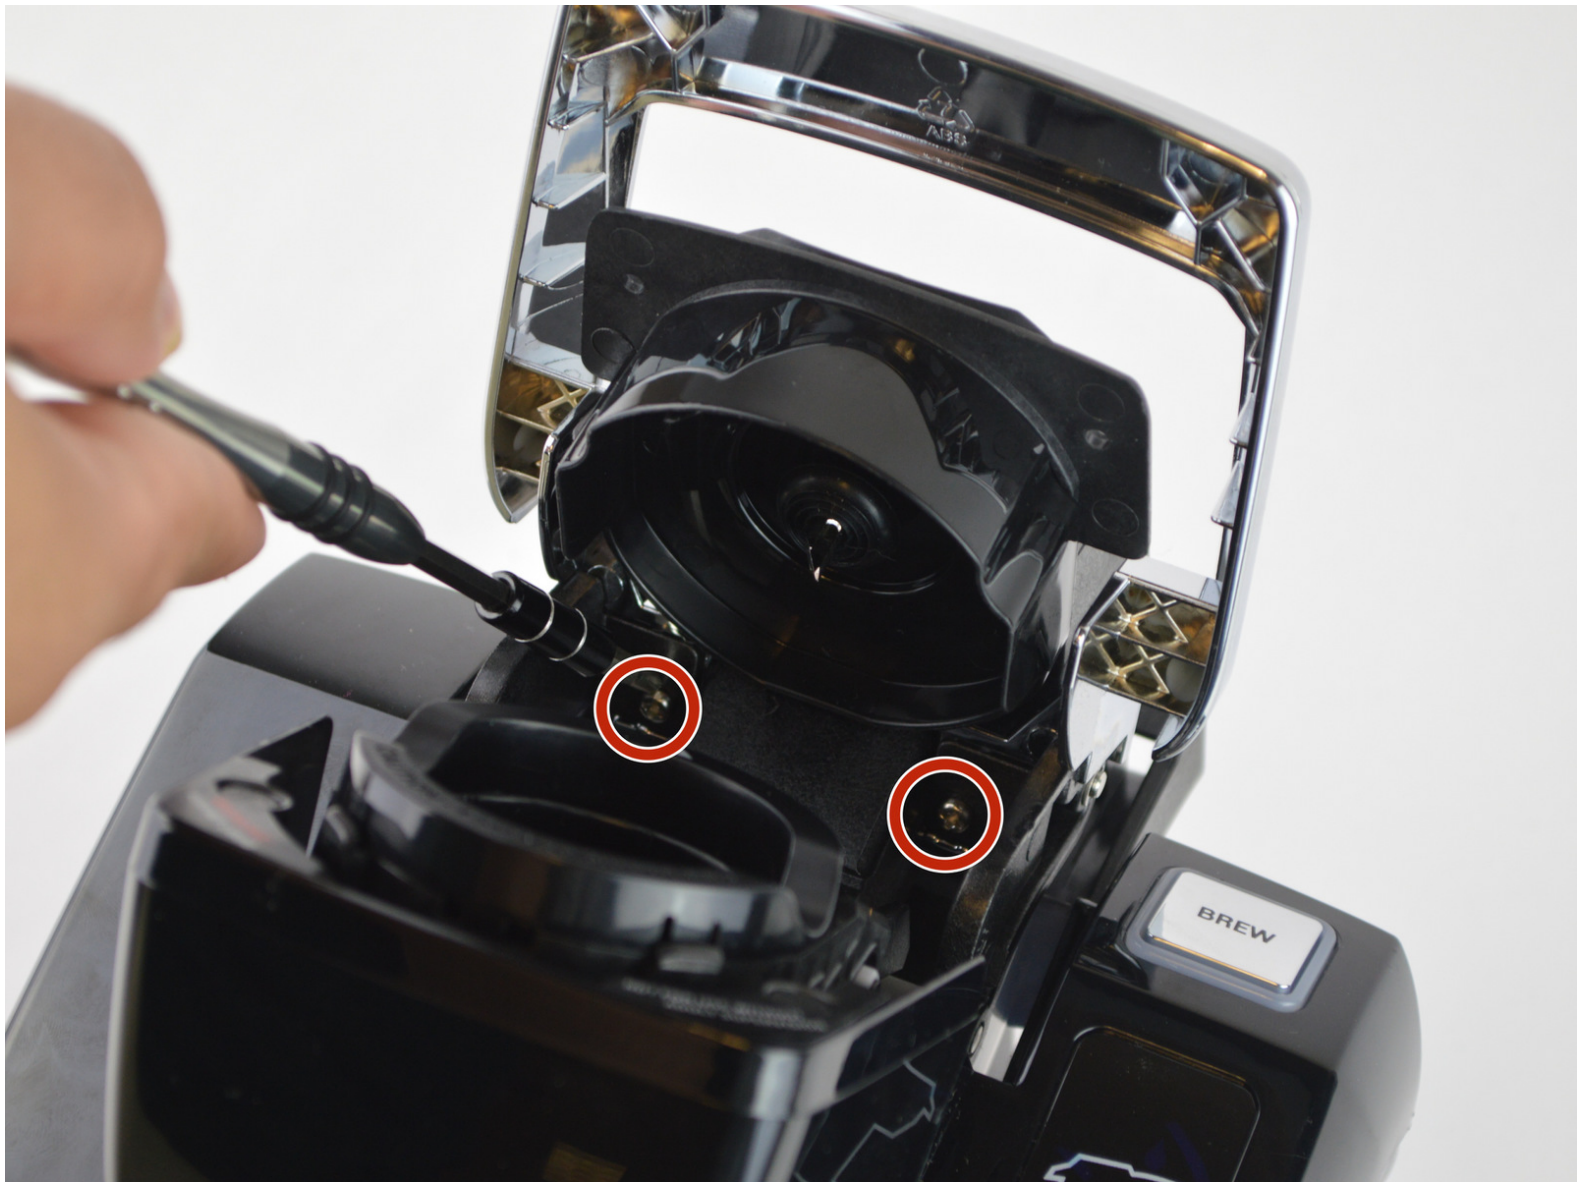

INTRODUCTION


In this guide we will show you how to successfully remove the handle from the K-cup.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Top Needle



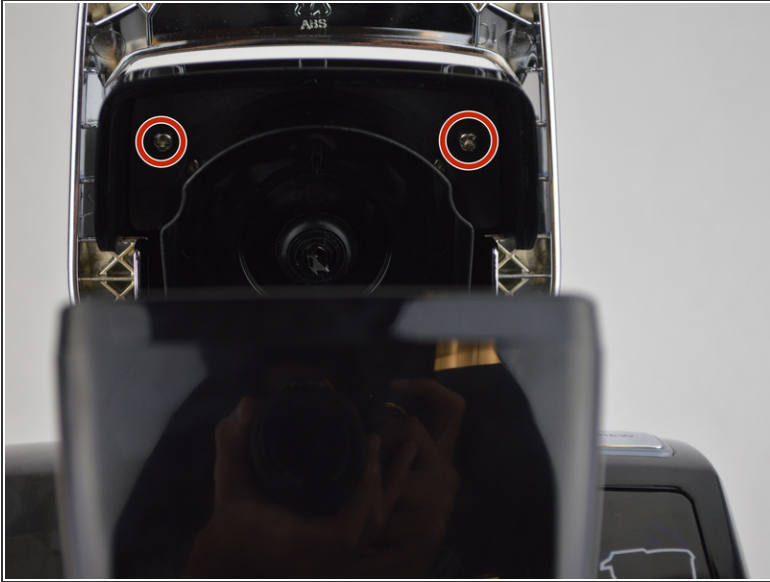


- Remove two 9 mm Phillips #1 screws.

⚠ Avoid the top needle if at all possible. The needle may cut you and or penetrate your skin.

- The screws are located on the top of where the K-Cup would be.

Step 2

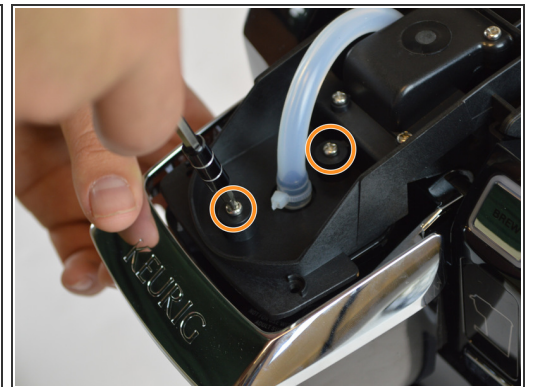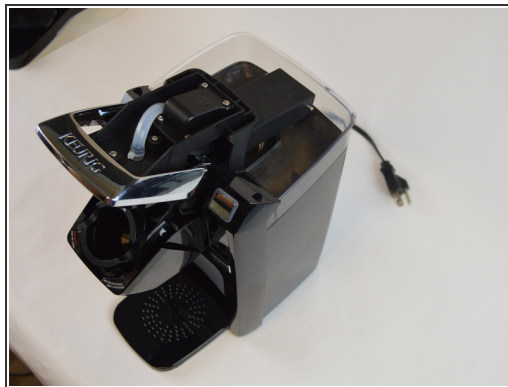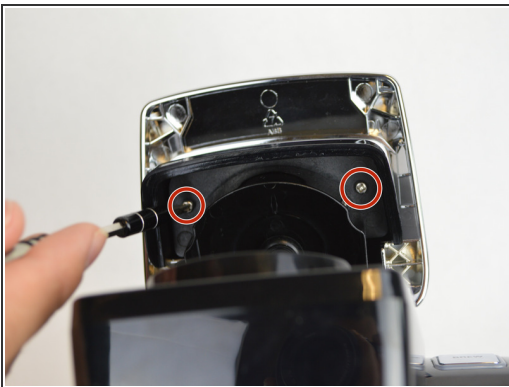

- Once you remove the screws, the top cover should come out.

- You will then want to remove these screws which are the same size


⚠ The needle is sharp so be careful

Step 3





- Once you get those removed, you are going to want to pull on the hose until it pops off.
- Once the hose comes off, the needle will fall out by itself.
- ⚠ Be careful when picking up the needle as the needle is sharp

Step 4 — Handle

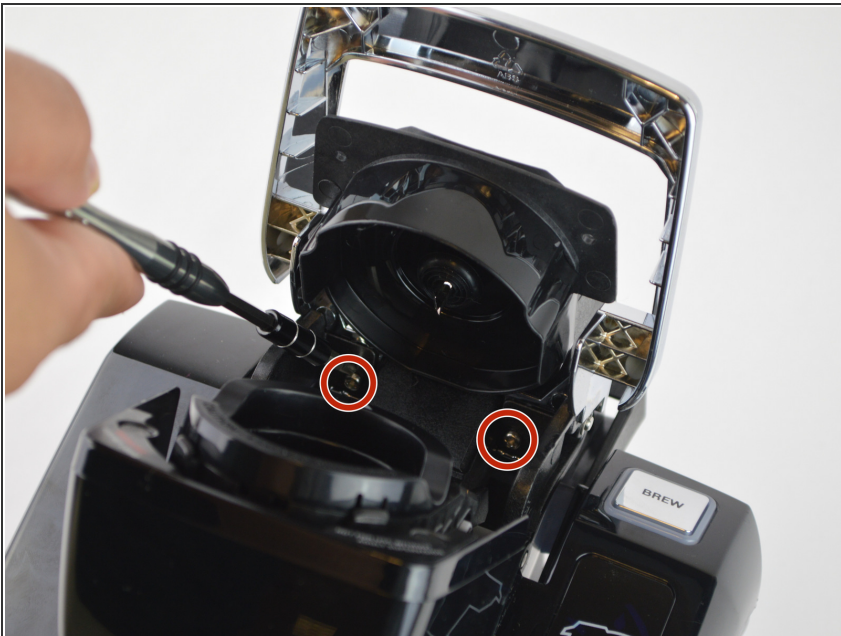


- Remove the two Phillips #1 screws.
- ⚠ The top needle is intact and there so be careful when in this area.

Step 5

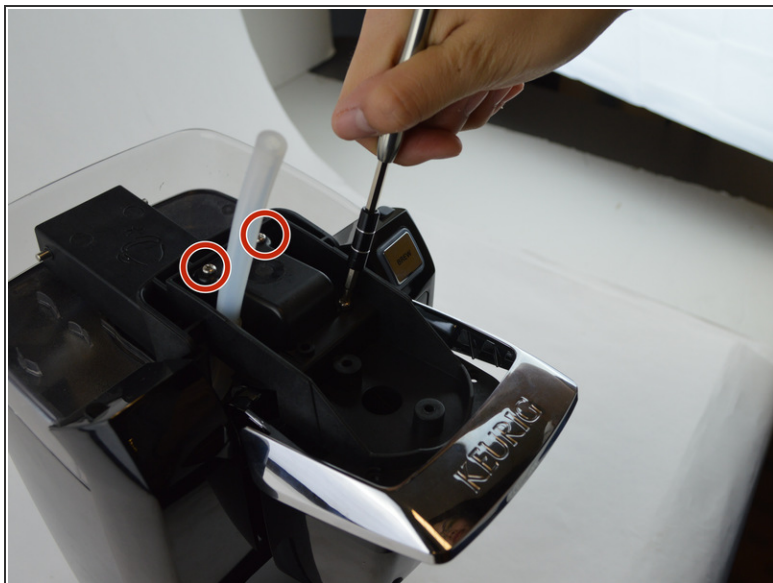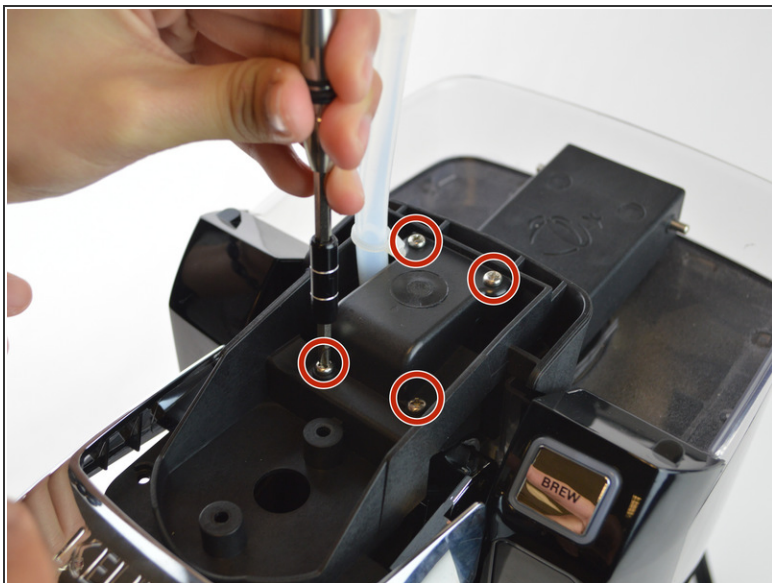

- Next after the removal of the hose on the top by simply pulling it off, remove the following four Phillips #1 screws.

Step 6

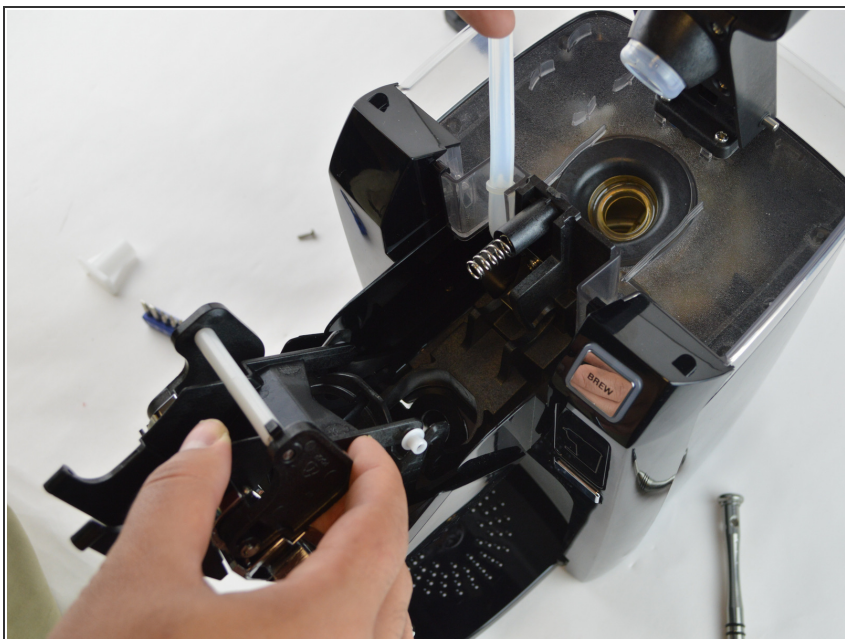



- Once you take off the screws, this part of the handle will come off.

Step 7




- To pull this part off, pull inwards with the these tabs located on both sides of the handle assembly.

Step 8

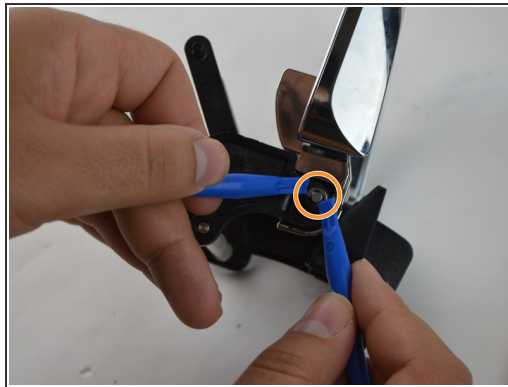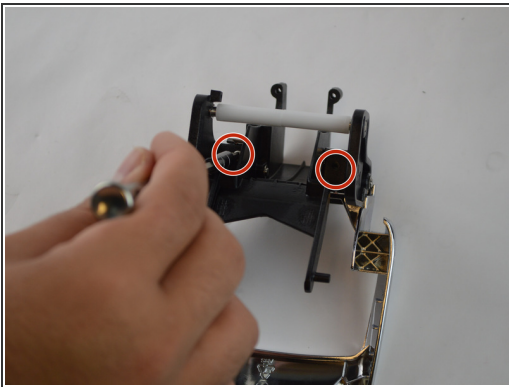

- Next remove these two Phillips #1 screws to allow the release of the actual handle from the frame.
- For the O rings we used the plastic prying tools. Just keep in mind that you might want to hold one side of the O ring down while trying to pry off the other side with the other.
- Once you get the O rings on both sides out, you can pull the handle buy pulling on each side.

Step 9

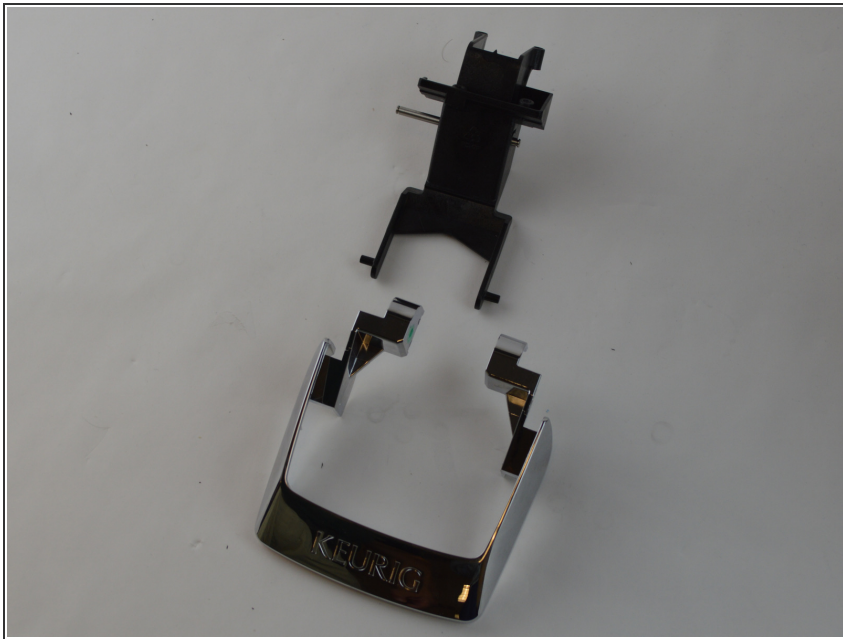

- Once you pull both sides, the handle will come off as shown.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-03 12:51:29 PM.